

# TABLE OF CONTENTS

*Hot- & Cold-Water  
Pressure Washers*



*Top- & Front-Load  
Automatic Parts Washers*



*Genuine Parts  
& Accessories*



*Biodegradable Detergents*

## Accessories and Parts

- ◆ **Hotsy Equipment**
  - ◆ Pressure Washers, Parts Washers & Waste Oil Heaters . . . . . 2-14
- ◆ **Pressure Washer Parts**
  - ◆ Pressure Washer Accessories . . . . . 15-20
  - ◆ Guns & Lances . . . . . 21-31
  - ◆ Hoses & Hose Reels . . . . . 32-41
  - ◆ Couplers, Fittings & Filters . . . . . 42-54
  - ◆ Nozzles . . . . . 55-64
  - ◆ Pumps & Pump Kits . . . . . 65-80
  - ◆ Unloaders, Valves, Injectors & Gauges . . . . . 81-98
  - ◆ Engines, Motors & Parts . . . . . 99-103
  - ◆ Burners & Coils . . . . . 104-111
  - ◆ Electrical Components . . . . . 112-119
  - ◆ Chassis Components . . . . . 120-121
- ◆ **Parts Washer Parts** . . . . . 122-125
- ◆ **Wash Bay Accessories** . . . . . 126-132
- ◆ **Hotsy Detergents** . . . . . 133-138
- ◆ **Index** . . . . . 142-144

# HOT WATER PRESSURE WASHERS

## Electric Powered

### 500 SERIES

and Model 680SS

- Oil-Fired or LP-Fired
- 115V/1PH
- 1725 RPM Direct-Drive Pump
- 7-Year Pump Warranty



Model 555SS (Shown with optional hose reel)



Model 558-Propane (Shown with optional Portagear & Propane Tank)



Model 560SS (Shown with optional hose reel)



Model 680SS

The **500 Series** delivers rugged, yet affordable, cleaning power for a broad range of applications, from agriculture to building maintenance. The sporty 555SS, with its stainless steel coil skin, is our most popular entry level hot water model—compact, evenly balanced, easy to maneuver, and engineered with the operator in mind. As with the entire Hotsy line, all models in the 500 series are ETL safety certified to UL-1776, with Hotsy pumps backed by a 7-year limited warranty. A pressure switch is standard on all 500 Series models. Equipped with a 50' hose.

MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMP	FUEL	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
555SS	1.109-033.0	2.2	1300	2	115/1	20	Oil	214,300	Hotsy Duplex	Direct	Std	33"Lx27"Wx41.5"H	370
558	1.109-610.0	2.2	1300	2	115/1	18	LP	227,000	Hotsy Duplex	Direct	Optional	31.5"Lx26"Wx41"H	320
560SS	1.109-034.0	2.1	1500	2.3	115/1	20	Oil	214,300	Hotsy Triplex	Direct	Std	33"Lx26"Wx44"H	385
680SS	1.109-035.0	3.0	1000	2	115/1	20	Oil	289,900	Hotsy Triplex	Direct	Std	33"Lx27"Wx45.5"H	385

SS=Stainless Steel

OPTIONS			OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION	PART NO.	ORIG NO.	DESCRIPTION
9.801-040.0	835525	10" LP Gas-Fired Draft Diverter, Model 558	8.717-791.0	891113	Propane Tank, 43 lb.
8.717-764.0	924889	8" Oil-Fired Draft Dampener, Models 555SS/560SS/680SS	8.903-034.0	280588	Float Tank, 555SS (Field Install)
8.903-049.0	280771	Portagear, Model 558	8.904-511.0	860202	360° Pivot Reel, 100'

### 700 SERIES

and Model 870SS

- Oil-Fired, LP- or Natural-Gas-Fired
- 7-Year Pump Warranty
- Direct- & Belt-Drive



Model 790SS



Model 771-Propane (Shown with optional Portagear & Propane Tank)



Model 870SS

The **700 Series** offers a nice balance of Hotsy ruggedness and cleaning performance, yet the affordability of an entry-level machine. In addition to the three direct-drive models, this series also offers a belt-drive model that cleans at 3.5 GPM and 2000 PSI. The multiple fuel and electrical options makes the 700 series ideal for meeting the needs of commercial customers. All models are ETL safety certified and feature the Hotsy pump with a 7-year warranty. A pressure switch is standard on all 700 Series models. Equipped with a 50' hose.

MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMP	FUEL	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
771	1.109-611.0	2.8	1500	3	230/1	13	LP	280,000	Hotsy Triplex	Direct	Optional	32"Lx27"Wx45.5"H	415
772	1.109-037.0	2.8	1500	3	230/1	13	NG	338,000	Hotsy Triplex	Direct	N/A	32"Lx27"Wx45.5"H	415
790SS	1.109-612.0	2.8	2000	4TEFC	230/1	20	Oil	289,900	Hotsy Triplex	Belt	Std	37"Lx28"Wx45.5"H	460
795SS*	1.109-039.0	3.5	2000	5	230/1	24	Oil	289,900	Hotsy Triplex	Belt	Std	37"Lx28"Wx45.5"H	500
795SS-208*	1.109-040.0	3.5	2000	5	208/1	27	Oil	289,900	Hotsy Triplex	Belt	Std	37"Lx28"Wx45.5"H	500
870SS	1.109-041.0	3.5	2000	5	230/1	27	Oil	324,100	Hotsy Triplex	Direct	Std	32"Lx29"Wx47"H	475

\*3450 RPM motor SS=Stainless Steel

OPTIONS			OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION	PART NO.	ORIG NO.	DESCRIPTION
9.801-040.0	835525	10" Natural Gas- or LP Gas-Fired Draft Diverter, Models 771/772	8.904-511.0	860202	360° Pivot Reel, 100'
8.717-764.0	924889	8" Oil-Fired Draft Dampener, Models 790SS, 795SS & 870SS	8.904-516.0	860201	360° Pivot Reel, 200'
8.903-049.0	280771	Portagear, Model 771	(Hose Reels fit all 700 Series Models EXCEPT 771/ 772 )		
8.717-791.0	891113	Propane Tank, 43 lb.			


# 900 SERIES

- Choose from Oil-Fired, LP-or Natural Gas-Fired
- Rugged Hotsy Pump with 7-Year Warranty
- Stainless-Steel Coil Skin
- Portable or Stationary
- Remote Ready
- Electronic Ignition (NG and LP Models)

Model 980SS  
(Shown with optional hose reel)



Model 982SS Natural Gas  
(Portability not available on gas-fired models)

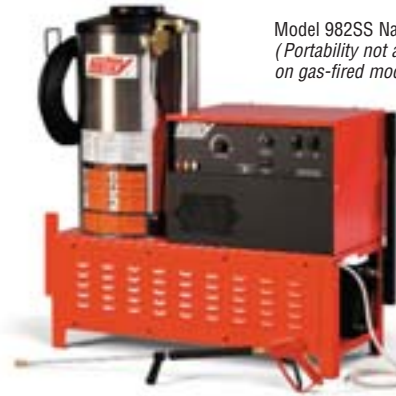

The 900 Series takes on the heaviest of industrial cleaning jobs. Built with Hotsy ruggedness throughout, the 15 models provide a broad selection of fuel and electrical options—delivering the cleaning power of 3.9 GPM @2000 PSI or 3.8 GPM @2300 PSI. Oil-heated models come with a wheel kit for on-site portability. The 900 series of hot water pressure washers are backed by a market-leading 7-year warranty on the Hotsy pump. A pressure switch and rupture disc are standard features on all 900 Series models. All models are ETL certified. Equipped with a 50' hose.

MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	FUEL	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
980SS	1.109-048.0	3.9	2000	5	1725	230/1	29	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	580
981SS	1.109-619.0	3.9	2000	5	1725	230/1	25	LP	360,997	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	615
982SS	1.109-620.0	3.9	2000	5	1725	230/1	25	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	550
990SS	1.109-049.0	3.9	2000	5	1725	230/3	19	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	580
990SS-208	1.109-050.0	3.9	2000	5	1725	208/3	20	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	580
991SS	1.109-621.0	3.9	2000	5	1725	230/3	16	LP	360,997	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	545
991SS-208	1.109-622.0	3.9	2000	5	1725	208/3	18	LP	360,997	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	545
992SS	1.109-623.0	3.9	2000	5	1725	230/3	16	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	545
992SS-208	1.109-624.0	3.9	2000	5	1725	208/3	18	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	595
993SS	1.109-051.0	3.9	2000	5	1725	460/3	10	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	580
994SS	1.109-625.0	3.9	2000	5	1725	460/3	8	LP	360,997	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	545
995SS	1.109-626.0	3.9	2000	5	1725	460/3	8	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	545
950SS-208	1.109-043.0	3.8	2300	6.2	3450	208/1	33	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	740
952SS-208	1.109-614.0	3.8	2300	6.2	3450	208/1	28	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	640
969SS	1.109-618.0	3.8	2300	6.2	3450	575/3	7	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	655

SS=Stainless Steel

\* Length extends to 50" with hose reel & wand bracket

**OPTIONS**

PART NO.	ORIG NO.	DESCRIPTION
8.903-031.0	280495	Primary Remote Station (1st Remote)
8.903-014.0	216722	Additional Remote Station(s). Use for Additional Remotes After Primary Remote
8.903-033.0	280515	Remote Soap Option – Requires Remote Station Option, use on first remote station. Purchase additional switch – P/N 8.716-037.0 (875985) and field wire for each additional remote station.
8.930-170.0		Auto Start/Stop Kit (Field Installed)
8.930-172.0		Thermal Shutdown Kit (Field Installed)
8.930-171.0*		Time Delay Shutdown (Field Installed)
8.903-079.0	480403	LP Conversion-Series: 952SS-208 & 969SS (Factory Installed)
8.717-728.0	835526	8" Natural Gas- or LP Gas-Fired Draft Diverter (Gas-fired models only)
8.717-764.0	924889	8" Oil-Fired Draft Dampener (Oil-fired models only)
9.802-633.0		Regulator, LP Assembly
8.907-393.0	280850	Portagear Kit (Oil-fired models only)
8.904-511.0	860202	360° Pivot Reel, 100' (Hose Reel fits all 900 Series Models)
8.904-516.0	860201	360° Pivot Reel, 200' (Hose Reel fits all 900 Series Models)

\* Note: Time Delay Shutdown and Auto Start/Stop cannot be combined on the same machine

# 1400 SERIES

- Oil-Fired, LP-or Natural Gas-Fired
- Belt-Drive Hotsy Pump
- Stainless Steel Coil Skin
- ETL Safety Certified
- Remote Ready
- Electronic Ignition (NG and LP Models)
- 7-Year Pump Warranty



1410SS



Model 1412SS (Shown with optional hose reel. Portability not available on gas fired models)



The 1400 Series packs the biggest punch of Hotsy's portable, electric-powered hot water pressure washers with a cleaning force of 3.9 GPM and 3000 PSI. Powered by a 7.5 HP, 1725 RPM or 8.2 HP, 3450 RPM Baldor motor, including portable and stationary models, the 1400 series offers hours of non-stop heavy-duty cleaning of everything from trucks to heavy equipment. Besides its ruggedness, the 1400 series is also ETL certified to the rigid UL-1776 safety standards. All models come standard with a stainless steel coil skin. A pressure switch and rupture disc are standard features on all 1400 Series models. Equipped with a 50' hose.

MODEL	PART NO.	GPM	PSI	HP	MOTOR RPM	VOLT/PH	AMP	FUEL	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
1410SS	1.109-022.0	3.9	3000	7.5	1725	230/1	37	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	640
1411SS	1.109-583.0	3.9	3000	7.5	1725	230/1	34	LP	360,997	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	610
1412SS	1.109-584.0	3.9	3000	7.5	1725	230/1	34	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	610
1420SS	1.109-023.0	3.9	3000	7.5	1725	230/3	25	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	640
1420SS-208	1.109-024.0	3.9	3000	7.5	1725	208/3	25	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	640
1421SS	1.109-585.0	3.9	3000	7.5	1725	230/3	24	LP	360,997	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	605
1421SS-208	1.109-586.0	3.9	3000	7.5	1725	208/3	24	LP	360,997	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	605
1422SS	1.109-587.0	3.9	3000	7.5	1725	230/3	24	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	605
1422SS-208	1.109-588.0	3.9	3000	7.5	1725	208/3	24	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	605
1423SS	1.109-025.0	3.9	3000	7.5	1725	460/3	14	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	640
1424SS	1.109-589.0	3.9	3000	7.5	1725	460/3	12	LP	360,997	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	605
1425SS	1.109-590.0	3.9	3000	7.5	1725	460/3	12	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	605
1450SS-208	1.109-027.0	3.9	3000	8.2	3450	208/1	44	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	650
1452SS-208	1.109-592.0	3.9	3000	8.2	3450	208/1	42	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	615
1467SS	1.109-031.0	3.9	3000	8.2	3450	575/3	11	Oil	342,900	Hotsy Triplex	Belt	Std	45"Lx18"Wx50"H*	645
1469SS	1.109-596.0	3.9	3000	8.2	3450	575/3	10	NG	364,835	Hotsy Triplex	Belt	N/A	45"Lx18"Wx50"H*	615

SS=Stainless Steel

\* Length extends to 50" with hose reel & wand bracket

### OPTIONS

PART NO.	ORIG NO.	DESCRIPTION
8.903-031.0	280495	Primary Remote Station (1st Remote)
8.903-014.0	216722	Additional Remote Station(s). Use for Additional Remotes After Primary Remote.
8.903-033.0	280515	Remote Soap Option – Requires Remote Station Option, use on first remote station. Purchase additional switch – P/N 8.716-037.0 (875985) and field wire for each additional remote station.
8.930-170.0		Auto Start/Stop Kit (Field Installed)
8.930-172.0		Thermal Shutdown Kit (Field Installed)
8.930-171.0*		Time Delay Shutdown (Field Installed)
8.903-079.0	480403	LP Conversion-Series: 1452SS-208 & 1469SS (Factory Installed)
8.717-728.0	835526	8" Natural Gas- or LP Gas-Fired Draft Diverter (Gas-fired models only)
8.717-764.0	924889	8" Oil-Fired Draft Dampener (Oil-fired models only)
8.907-393.0	280850	Portage Kit (Oil-fired models only)
8.904-511.0	860202	360° Pivot Reel, 100' (Hose Reel fits all 1400 Series Models)
8.904-516.0	860201	360° Pivot Reel, 200' (Hose Reel fits all 1400 Series Models)

\* Note: Time Delay Shutdown and Auto Start/Stop cannot be combined on the same machine

# 1800 SERIES

- Natural Gas or optional LP-Fired
- 7-Year Pump Warranty
- Electronic Ignition
- Time Delay Shutdown ■ Thermal Shutdown ■ Remote Ready



The **1800 Series** is a compact, affordable solution for cleaning with hot water indoors. The 12 stationary models are electric-driven and natural gas or LP gas-heated, using Hotsy's high-efficiency vertical hot water coil. The coil skin comes standard with stainless steel. The cabinet is protected by a durable epoxy powder coat paint. Designed with the operator in mind, operating instructions and warnings are both multi-lingual and illustrated. The control panel is ideally positioned for easy access. This heavy-duty cleaning machine is ideal for use in manufacturing or even food processing facilities where hot water is needed for cleaning machinery and equipment indoors. All models are certified to the rigid UL-1776 safety standards. A pressure switch and rupture disc are standard features on all 1800 Series models. Equipped with a 50' hose.



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMP	FUEL	BTU/HR	PUMP	DRIVE	DIMENSIONS	SHIP WT (lbs)
1812SS	1.109-597.0	5.9	2500	10	230/1	42	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	885
1812SS-208	1.109-598.0	5.9	2500	10	208/1	48	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	885
1822SS	1.109-599.0	5.9	2500	10	230/3	28	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	870
1822SS-208	1.109-600.0	5.9	2500	10	208/3	33	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	870
1825SS	1.109-601.0	5.9	2500	10	460/3	14	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	885
1836SS	1.109-602.0	5.9	2500	10	575/3	11	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	885
1852SS	1.109-603.0	4.8	3000	10	230/1	42	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	885
1852SS-208	1.109-604.0	4.8	3000	10	208/1	48	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	885
1855SS	1.109-605.0	4.8	3000	10	460/3	14	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	870
1856SS	1.109-606.0	4.8	3000	10	575/3	11	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	885
1862SS	1.109-607.0	4.8	3000	10	230/3	28	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	880
1862SS-208	1.109-608.0	4.8	3000	10	208/3	33	NG	558,050	Hotsy Triplex	Belt	51.5"Lx25.6"Wx56"H	845

OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION
8.903-031.0	280495	Primary Remote Station (1st Remote)
8.903-014.0	216722	Additional Remote Station(s). Use for Additional Remotes After Primary Remote. Purchase of Primary Remote required.
8.903-069.0	480241	Auto Start/Stop Kit (Factory Installed)

OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION
8.903-033.0	280515	Remote Soap Option—Requires Remote Station Option, use on first remote station. Purchase additional switch—PN 8.716-037.0 (875985), and field wire for each additional remote station.
8.903-074.0	480284	LP Conversion Kit (Factory Installed)
9.801-040.0	835525	10" Natural Gas- or LP Gas-Fired Draft Diverter

# 5700 SERIES

- Oil or Natural Gas-Fired
- Belt-Drive Hotsy Pump with 7-Year Warranty
- 15 HP Baldor Motor ■ Electronic Ignition ■ Time Delay Shutdown ■ Thermal Shutdown ■ 24-Volt Control ■ Remote Ready



The **5700 Series** produces a punch like few other indoor or outdoor high-pressure cleaning machines. With its 15 HP Baldor motor driving the incomparable Hotsy Pump, backed by a 7-year warranty, the 5700 Series delivers cleaning power of 7.8 GPM and 3000 PSI. The painted cabinet is protected by a durable epoxy powder coat finish. The control panel is positioned for easy operator access. This heavy-duty cleaning machine is ideal for cleaning indoors or outdoors with hot water and can be outfitted to heat with oil, diesel or natural gas. All models are certified to the rigid UL-1776 safety standards. A pressure switch and rupture disc are standard features on all 5700 Series models. Equipped with a 50' hose.



MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMP	FUEL	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
S5730-3	1.109-627.0	7.8	3000	15	230/3	47	Oil	768,000	Hotsy Triplex	Belt	Optional	59"Lx32.5"Wx50.5"H	1060
S5733-1	1.109-631.0	7.8	3000	15	460/3	25	Oil	768,000	Hotsy Triplex	Belt	Optional	59"Lx32.5"Wx50.5"H	1070
S5730-5	1.109-628.0	7.8	3000	15	208/3	50	Oil	768,000	Hotsy Triplex	Belt	Optional	59"Lx32.5"Wx50.5"H	1060
S5732-5	1.109-630.0	7.8	3000	15	208/3	47	NG	720,450	Hotsy Triplex	Belt	N/A	59"Lx32.5"Wx50.5"H	985
S5732-4	1.109-629.0	7.8	3000	15	230/3	45	NG	720,450	Hotsy Triplex	Belt	N/A	59"Lx32.5"Wx50.5"H	985
S5735-3	1.109-632.0	7.8	3000	15	460/3	23	NG	720,450	Hotsy Triplex	Belt	N/A	59"Lx32.5"Wx50.5"H	975

OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION
8.903-031.0	280495	Primary Remote Station (1st Remote)
8.903-014.0	216722	Additional Remote Station(s). Use for Additional Remotes After Primary Remote. Purchase of Primary Remote required.
8.903-069.0	480241	Auto Start/Stop Kit (Factory Installed)

OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION
8.903-033.0	280515	Remote Soap Option—Requires Remote Station Option, use on remote station. Purchase additional switch – P/N 8.716-037.0 (875985) and field wire for each additional remote station.
9.801-040.0	835525	10" Natural Gas-Fired Draft Diverter

### GAS-ENGINE SERIES

#### DIRECT-DRIVE

- Oil-Fired
- 12 Volt DC
- Direct Drive
- 4 Battery-less Models
- 2 Electric-Start Models
- 7-Year Pump Warranty



871SS



921SS



965SS



1065SSE

The **Gas Engine Series** consist of the most compact and portable hot water pressure washers on the market. Powered by reliable gasoline engines, all you need is water and you can clean anywhere anytime. The six models offer a broad range of cleaning power, from 2.7 to 3.8 GPM and from 2400 to 3500 PSI. All models are backed by Hotsy's 7-year pump warranty and all are ETL safety certified. All models are equipped with a standard pressure switch and 50' hose.



MODEL	PART NO.	GPM	PSI	HP	ENGINE	BURNER	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
871SS*	1.110-014.0	2.7	2400	7	Robin	12V DC	248,500	Hotsy Triplex	Direct	Std	43"Lx27"Wx39"H	370
921SS*	1.109-645.0	3.0	3000	9	Robin	12V DC	248,500	Hotsy Triplex	Direct	Std	47"Lx31"Wx41"H	430
965SS*	1.110-015.0	3.0	3000	9	Honda	12V DC	248,500	Hotsy Triplex	Direct	Std	47"Lx31"Wx41"H	450
1065SS*	1.110-010.0	3.5	3000	11	Honda	12V DC	309,900	Hotsy Triplex	Direct	Std	47"Lx31"Wx45"H	495
1065SSE†	1.110-011.0	3.5	3000	11	Honda	12V DC	309,900	Hotsy Triplex	Direct	Std	47"Lx31"Wx45"H	495
1075SSE†	1.110-012.0	3.8	3500	13	Honda	12V DC	309,900	Hotsy Triplex	Direct	Std	47"Lx31"Wx45"H	500

\*Battery not required †12V battery required, but not supplied E= Electric-start engine

### GAS-ENGINE SERIES

#### BELT-DRIVE

- Oil-Fired
- 12 Volt DC
- Belt Drive
- 2 Electric-Start Models
- 7-Year Pump Warranty



1075BE (Shown with optional caster wheel kit)



965B (Shown with optional pneumatic tires)



1080BE (Shown with optional stainless steel coil wrap and skid rails)

The **belt-drive versions of the Gas Engine Series** provide versatility with the roll cage design. Designed to fit the needs of the end-user, this versatile hot water washer converts easily to a skid unit, portable with wheels or a wheel/caster kit, or can be mounted on a trailer. Powered by reliable gasoline engines, the four models offer a broad range of cleaning power, from 3.0 to 4.6 GPM and from 3000 to 3500 PSI. All models are backed by Hotsy's 7-year pump warranty and all are ETL safety certified. All models are equipped with a standard pressure switch and 50' hose.



MODEL	PART NO.	GPM	PSI	HP	ENGINE	BURNER	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
921B*	1.110-564.0	3.0	3000	9	Robin Subaru	12V DC	248,500	Hotsy Triplex	Belt	Optional	42"Lx27.5"Wx39"H	625
965B*	1.110-565.0	3.0	3000	9	Honda	12V DC	248,500	Hotsy Triplex	Belt	Optional	42"Lx27.5"Wx39"H	625
1075BE†	1.110-566.0	3.8	3500	13	Honda	12V DC	385,800	Hotsy Triplex	Belt	Optional	42"Lx27.5"Wx39"H	665
1080BE†	1.110-567.0	4.6	3500	16	Vanguard	12V DC	385,800	Hotsy Triplex	Belt	Optional	42"Lx27.5"Wx39"H	665

\*Battery not required †12V battery required, but not supplied E= Electric-start engine B= Belt Drive

#### OPTIONS

PART NO.	DESCRIPTION
8.916-172.0	Float Tank Kit (includes high pressure detergent kit), 1075BE & 1080BE models
8.916-173.0	Float Tank Kit (includes high pressure detergent kit), 921B & 965B models
8.931-259.0	Skid Rail Kit (Field Installed)- adds 3.875" to height
8.931-260.0	Caster Kit - 2 casters / 2 wheels (Field Installed) - adds 7.5" to height
8.931-261.0	Pneumatic Tire Kit with Handle Bar (Field Installed) - adds 10" to width, 6" to height
8.916-175.0	High Pressure Detergent Kit, 1075BE & 1080BE models
8.916-174.0	High Pressure Detergent Kit, 921B & 965B models
8.915-274.0	Stainless Steel Coil Wrap (Field Installed)

# 1200 SERIES

and Model 5645

- Gas-Powered
- Oil-Fired
- Belt Drive
- Electric-start
- 7-Year Pump Warranty



1260SS



1270SS Shown with optional Portagear Kit



5645

The 1200 Series delivers some serious on-site, hot water cleaning capability of up to 6 GPM and 4000 PSI. Rugged gasoline engines all have electric start. Six models come with a 2000W generator. The self-contained cleaning units are built to hold up under the toughest of conditions. All feature the Hotsy pump, with its 7-year warranty and ETL safety certification (CSA-Certified for non-generator models). All 1200 Series models are equipped with a standard flow switch, rupture disk and 50' hose.



MODEL	PART NO.	GPM	PSI	HP	ENGINE	BURNER	BTU/HR	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
1260SS	1.110-533.0	4.3	3000	16	Vanguard	12V DC	385,800	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	780
1260SSG*	1.110-535.0	4.3	3000	16	Vanguard	120V AC	398,400	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	810
1270SS	1.110-557.0	4.5	4000	20	Honda	12V DC	385,800	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	840
1270SSG*	1.110-536.0	4.5	4000	20	Honda	120V AC	398,400	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	870
1280SS	1.110-558.0	5.1	3500	20	Honda	12V DC	385,800	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	840
1280SSG*	1.110-537.0	5.1	3500	20	Honda	120V AC	398,400	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	870
1285SS	1.110-043.0	5.1	3500	21	Vanguard	12V DC	385,800	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	840
1285SSG*	1.110-044.0	5.1	3500	21	Vanguard	120V AC	398,400	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	870
1290SS	1.110-538.0	5.6	3000	20	Honda	12V DC	385,800	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	840
1290SSG*	1.110-539.0	5.6	3000	20	Honda	120V AC	398,400	Hotsy Triplex	Belt	Optional	45"Lx33"Wx52"H	870
5645*	1.110-556.0	6.0	3000	24	Honda	120V AC	528,000	Hotsy Triplex	Belt	Optional	61"Lx32"Wx50"H	1110

\*Models include a 2000W Generator 12V battery is required for all models, but is not supplied

OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION
8.903-025.0	280199	Portagear Kit, All Models Except 5645

SUPER DUTY OPTION KIT		
PART NO.	ORIG NO.	DESCRIPTION
8.903-080.0	28-480600	1260SSG
8.903-081.0	28-480610	1280SS / 1280SSG / 1285SS / 1285SSG / 1290SS / 1290SSG
8.903-082.0	28-480620	1270SSG

**General Description-Modifications to existing equipment:**  
 Remove Float Tank. Replace Flow Switch with HD Pressure Switch. Replace unloader with VB80. Remove inlet detergent injector. Add Hot Seals to pump. Replace HC500 pump with HC930 pump (1260SS/G only). Replace existing coil with stainless steel wrapped coil with base plate. Coil wound as a gas coil to reduce soot build up.

### Super Skid HSS SERIES

- Diesel-Powered
- Oil-Fired
- Belt Drive
- Electric-Start



The Super Skid HSS Series is by far, the largest, most powerful of Hotsy's hot water pressure washers. All models come standard with the reliable Hotsy triplex belt-driven high-pressure pump. The Super Skid HSS series models are rated for continuous use and are ideal for heavy duty, on-site cleaning where electricity is not available. Models are powered by a Lombardini engine with electric start and all feature a 3/4-inch Schedule 80 heating coil with stainless steel skin and 5-year warranty. A rupture disc and flow switch are standard features on all HSS Super Skid models.



MODEL	PART NO.	GPM	PSI	DIESEL ENGINE	HP	BURNER	BTU/HR	PUMP	HOSE	DIMENSIONS	SHIP WT (lbs)
HSS-503089E	1.110-546.0	4.8	3000	Lombardini	16	120V AC	620,000	Hotsy Triplex	50'-3/8"	66"Lx37"Wx53"H	1580
HSS-603289E	1.110-547.0	6.3	3200	Lombardini	27	120V AC	620,000	Hotsy Triplex	50'-3/8"	66"Lx37"Wx53"H	1650
HSS-803089E	1.110-548.0	7.8	3000	Lombardini	27	120V AC	920,000	Hotsy Triplex	50'-1/2"	73"Lx37"Wx64"H	1990
HSS-102589E	1.110-545.0	9.5	2500	Lombardini	27	120V AC	920,000	Hotsy Triplex	50'-1/2"	73"Lx37"Wx64"H	1990

All Models are Electric Start and include a 2000W Generator. 12V battery is required for all models, but is not supplied

### HWE SERIES

#### All Electric Models

- All Electric
- Belt Drive
- Auto/Start Stop
- Stainless Steel Coil
- 7-Year Pump Warranty



The HWE Series is powered and heated by electricity, making it ideal for indoor use. It's a quiet machine with no fumes, making it ideal for food service and in-plant cleaning. Water is heated in a stainless steel heating coil, immersed in a tank of water solution, allowing for instant hot water once you pull the trigger. The heating elements do not come in contact with the pressurized water, which results in less maintenance and minimizes scale build up. The HWE features a Baldor motor, which drives a belt-drive Hotsy Triplex pump, with 7-year warranty, and an insulated variable pressure wand. ETL certified. Flow switch is standard on the HWE Series. All models equipped with a 50' hose.



MODEL	PART NO.	GPM	PSI	HP	MOTOR	AMPS	VOLT / PH	KvA HOUR	BTU /	PUMP	DRIVE	DIMENSIONS	SHIP WT (lbs)
HWE-4020C	1.109-646.0	3.9	2000	6.2	Baldor	55.2	460/3	40.5	138,308	Hotsy Triplex	Belt	34"Lx25"Wx52"H	620
HWE-4030C	1.109-647.0	3.46	3000	7.5	Baldor	59	460/3	40.5	138,308	Hotsy Triplex	Belt	34"Lx25"Wx52"H	620

#### OPTIONS

PART NO.	ORIG NO.	DESCRIPTION
8.903-042.0	280711	Stainless Steel Base & Cover, 1700 Series (Factory installed)
8.725-157.0	280730	Option, Time Delay Shutdown HWE-4020C
8.725-158.0	280731	Option, Time Delay Shutdown HWE-4030C

\*No Charge because it replaces the Auto / Start Stop

### 9400 SERIES Heating Modules

The 9400 Series heating modules give customers the flexibility to "convert" a cold water pressure washer into a hot water unit. By attaching the heating module to a cold water pressure washer the pressurized water is now heated to produce all the benefits of hot water cleaning. The four models use fuel oil, diesel or natural gas to heat the water using Hotsy's high-efficiency, vertical heating coil. All models are equipped with a flow switch to control the burner.



Model 9462



Model 9452



MODEL	PART NO.	GPM (Max)	GPM (Min)	VOLT/PH	BTU/HOUR	AMP	FUEL	DIMENSIONS	SHIP WT (lbs)
9450	1.103-905.0	10	6	115/1	700,000	8	Oil-Fired	32.5"Lx25"Wx50.5"H	525
9452	1.103-906.0	10	6	115/1	540,000	1	Natural-Gas-Fired	32.5"Lx25"Wx50.5"H	500
9460	1.103-907.0	10	6	115/1	920,000	8	Oil-Fired	40.5"Lx32"Wx65"H	920
9462	1.103-908.0	10	6	115/1	920,000	1	Natural-Gas-Fired	40.5"Lx32"Wx65"H	935

#### OPTIONS

PART NO.	ORIG NO.	DESCRIPTION
8.903-076.0	480291	Natural-Gas to LP Conversion for Model 9452 (Factory Installed)
8.903-075.0	480290	Natural-Gas to LP Conversion for Model 9462 (Factory Installed)
9.801-040.0	835525	10" Natural Gas-Fired Draft Diverter for Model 9452
8.717-730.0	835531	12" Natural Gas-Fired Draft Diverter for Model 9462

#### Fuel-burner types available:

- Diesel
- Kerosene
- Home Heating Oil
- Natural Gas
- LP Gas (Optional)



# BD SERIES

**BELT DRIVE**

BD Series shown in large cage (4-wheel) version. Small cage 2-wheel version also available.



The **BD Series** is the most rugged cold water pressure washer on the market with its all-steel frame and cage, Hotsy belt-drive, triplex pump and cleaning power of up to 5000 PSI. Four gas models make up what is Hotsy's most durable cold water line-up ever. All models equipped with a 50' hose.



- Honda or Vanguard engine
- Small & Large Roll Cage design with lifetime warranty
- Totally enclosed belt guard
- 13" tubed pneumatic tires for easy handling
- Plated steel high-pressure wand w/ side handle
- ETL certified to UL-1776 safety standards

MODEL	PART NO.	GPM	PSI	HP	ENGINE	PUMP	DRIVE	FRAME	DIMENSIONS	NO. WHEELS	SHIP WT (lbs)
BD-373539	1.107-021.0	3.7	3500	13	Honda GX	Hotsy Triplex	Belt	Small Cage	42"Lx26"Wx30"H	2	290
BD-404029	1.107-022.0	4.0	4000	16	Vanguard	Hotsy Triplex	Belt	Large Cage	46"Lx30"Wx36"H	4	360
BD-405039E*	1.107-023.0	4.0	5000	20	Honda GX	Hotsy Triplex	Belt	Large Cage	46"Lx30"Wx36"H	4	417
BD-455039E*	1.107-024.0	4.5	5000	24	Honda GX	Hotsy Triplex	Belt	Large Cage	46"Lx30"Wx36"H	4	430

\*E = Electric Start

OPTIONS			OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION	PART NO.	ORIG NO.	DESCRIPTION
8.904-109.0	35-356	E-Zee Hose Reel Kit*100' (small cage)	8.904-113.0	35-360	5000 PSI Hose Reel Kit* (large cage)
8.904-110.0	35-357	E-Zee Hose Reel Kit*100' (large cage)	8.904-115.0	35-362	5000 PSI Dual Hose Reel Kit,*†(large cage)

\*Kit includes hose reel and mounting hardware †Includes garden hose reel and high-pressure hose reel

# BX SERIES

**BELT DRIVE**

BX Series shown with optional hose reel & mounting kit.



The **BX Series** is the similarly rugged, but more compact, line of belt-drive cold water pressure washers. Powered by Honda GX engines, the BX series delivers cleaning power up to 3500 PSI and an all-steel frame protected by a durable powder coat finish. Hotsy pumps carry a 7-year warranty. Equipped with a 50' hose.



- Honda GX engines, 5.5 & 13 HP
- Steel frame with lifetime warranty
- Totally enclosed belt guard
- 13" tubed pneumatic tires for easy handling
- Insulated steel high-pressure wand w/ side handle
- ETL certified to UL-1776 safety standards

MODEL	PART NO.	GPM	PSI	HP	ENGINE	START	PUMP	FRAME	DIMENSIONS	DRIVE	SHIP WT (lbs)
BX-282039	1.107-026.0	2.8	2000	5.5	Honda GX	Recoil	Hotsy Triplex	Small Chassis	37"Lx21"Wx24"H	Belt	152
BX-373539	1.107-028.0	3.7	3500	13	Honda GX	Recoil	Hotsy Triplex	Large Chassis	45"Lx26"Wx24"H	Belt	261

OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION
8.904-103.0	35-350	EZ Hose Reel Kit 100' (incl. reel & mounting hardware)

# DB SERIES

**DIRECT DRIVE**

DB Series shown with optional hose reel & mounting kit.



The **DB Series** is the most compact, affordable alternative, in the cold water line featuring a direct-drive pump. All four models are powered by reliable Honda engines. Light-weight design and tubed pneumatic tires make for easy maneuvering.



- Honda GX engines, 5.5 to 13 HP
- Steel frame with lifetime warranty
- 10" tubed pneumatic tires for easy handling
- Protected by a powder coat finish
- Insulated, 2-piece steel high-pressure wand
- ETL certified to UL-1776 safety standards

MODEL	PART NO.	GPM	PSI	HP	ENGINE	PUMP/MODEL #	DRIVE	DIMENSIONS	HOSE	SHIP WT (lbs)
DB-232439	1.107-031.0	2.3	2400	5.5	Honda GX	Hotsy Triplex	Direct	35"Lx21"Wx24"H	50'	140
DB-252739	1.107-032.0	2.5	2700	6.5	Honda GX	Hotsy Triplex	Direct	35"Lx21"Wx24"H	50'	145
DB-303039	1.107-033.0	3.0	3000	9	Honda GX	Hotsy Triplex	Direct	35"Lx21"Wx24"H	50'	175
DB-383539	1.107-034.0	3.8	3500	13	Honda GX	Hotsy Triplex	Direct	35"Lx21"Wx24"H	50'	194

OPTIONS		
PART NO.	ORIG NO.	DESCRIPTION
8.904-105.0	35-352	EZ Hose Reel Kit 100' (incl. reel & mounting hardware)

# COLD WATER PRESSURE WASHERS

Electric Powered

## 1700 SERIES

**BELT DRIVE**



*Shown with optional stainless steel cabinet*



The **1700 Series** offers the most reliable stationary, electric-powered, cold water pressure washer featuring a Hotsy belt-drive pump with 7-year warranty, insulated variable pressure wand and ETL safety certification. All models equipped with a 50' hose.

- Baldor electric motor, 2-10 HP
- Hotsy pump with 7-year warranty
- Downstream detergent injector
- Insulated SS variable pressure wand
- Hot Water Seal Kit standard
- Option-ready for time delay shutdown or automatic stop-start.

MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	PUMP	DRIVE	PORTABILITY	DIMENSIONS	SHIP WT (lbs)
1710	1.106-511.0	2.75	1000	2	120/1	20	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	200
1720	1.106-512.0	3.9	2000	6	230/1	28	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	275
1722	1.106-513.0	3.9	2000	6	208/1	30	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	240
1723	1.106-514.0	3.9	2000	6	208/3	16	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	250
1724	1.106-515.0	3.9	2000	6	230/3	14.4	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	250
1725	1.106-516.0	3.9	2000	6	460/3	7.2	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	250
1743	1.106-529.0	4.76	3000	10	208/3	29	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	302
1744	1.106-530.0	4.76	3000	10	230/3	26.8	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	300
1745	1.106-531.0	4.76	3000	10	460/3	13.5	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	315
1753	1.106-534.0	5.93	2500	10	208/3	29	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	320
1754	1.106-535.0	5.93	2500	10	230/3	26.8	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	310
1755	1.106-536.0	5.93	2500	10	460/3	13.5	Hotsy Triplex	Belt	Optional	31"Lx21"Wx16"H	310

OPTIONS	1700 SERIES	
PART NO.	ORIG NO.	DESCRIPTION
9.801-031.0	280700	Kit, 1700 Wheel w/Chemical Rack
8.903-036.0	280701	Kit, 1700 Wall Mount
8.903-037.0	280702	Kit, 1700 Floor Stand, Tall (20 3/4"W x 29"D x 36"H)
8.903-038.0	280703	Kit, Caster Wheels for 1700 Floor Stand
8.903-039.0	280704	Kit, Hose Reel w/Bracket for 1700 Stand & Wall Mount Kits
8.903-040.0	280705	Kit, 1700 Floor Stand, Short (20 3/4"W x 29"D x 24"H)
8.903-043.0	280712	Kit, 1700 Wall Mount, Stainless Steel
8.903-041.0	280710	Time Delay Shut Down, For 172x, 173x & 174x Models (Factory Installed)
8.903-045.0	280714	Time Delay Shut Down for 1710 (Factory Installed)
8.903-044.0	280713	Time Delay Shut Down for 175x Models (Factory Installed)
8.903-042.0	280711	Stainless Steel Base & Cover, 1700 Series (Factory Installed)
8.903-047.0	280717	Automatic Stop/Start for 1710 & 172x Models
8.903-048.0	280718	Automatic Stop/Start for 175x Models
8.903-046.0	280715	Automatic Stop/Start for 173x & 174x Models)
8.903-617.0	30-635	Kit, 1700 Floor Stand, Tall, Stainless Steel



*Model 1710 shown with optional wheel kit (PN 9.801-031.0).*



*1700 Series shown with optional hose reel kit, (PN 8.903-039.0), cart (PN 8.903-037.0), caster wheel kit (PN 8.903-038.0) and stainless steel base and cover (PN 8.903-042.0).*

# EP SERIES

**DIRECT DRIVE**



The EP Series offers a portable alternative to the electric-powered, cold water pressure washer line featuring the Hotsy direct-drive pump with a 7-year warranty. The EP's functional design is further enhanced by 10" tubed pneumatic tires, a convenient hose-and-gun rack and ETL safety certification.



- 1725 RPM Baldor electric motor
- Steel frame with lifetime warranty
- Hotsy pump with 7-year warranty
- Insulated wand and fatigue-free gun
- Powder coat finish protection
- ETL safety certification

MODEL	PART NO.	GPM	PSI	HP	VOLT/PH	AMPS	PUMP	DRIVE	DIMENSIONS	HOSE	SHIP WT (lbs)
EP-301009D	1.106-026.0	3.0	1000	2	120/1	20	Hotsy Triplex	Direct	35"Lx21"Wx24"H	50'	163
EP-301509A	1.106-027.0	3.0	1500	3	230/1	15	Hotsy Triplex	Direct	35"Lx21"Wx24"H	50'	157
EP-352009A	1.106-028.0	3.5	2000	5	230/1	20	Hotsy Triplex	Direct	35"Lx21"Wx24"H	50'	210

OPTIONS			EP SERIES
PART NO.	ORIG. NO.	DESCRIPTION	
8.904-107.0	35-354	EZ Hose Reel Kit 100' (incl. reel & mounting hardware)	

## HAND-HELD COLD WATER PRESSURE WASHER

# HC SERIES

Gasoline-Powered

**DIRECT DRIVE**



The HC Series is the hand-held model of the gasoline-powered line, delivering cleaning capability of 2400 PSI. The HC is driven by a Honda engine and features a reliable direct-drive pump and is ETL safety certified.



- Honda engine, 5.5 HP
- Direct-drive high-pressure pump
- Cleaning power of 2400 PSI
- Weighs 70 lbs.
- Lifetime warranty on frame
- Convenient carrying handle

MODEL	PART NO.	GPM	PSI	HP	ENGINE	PUMP	DRIVE	DIMENSIONS	HOSE	SHIP WT(lbs)
HC-232439	1.107-036.0	2.3	2400	5.5	Honda GX	HotsyTriplex	Direct	20"Lx16"Wx17"H	30'	108

## WASTE OIL HEATERS

# WASTE OIL HEATERS



Hotsy Waste Oil Heaters provide an economical solution to disposing of used oil. Reduce high disposal fees as well as heating costs. Thermostatically controlled, each waste oil heater is equipped with a premium waste oil supply pump to provide consistent, trouble-free operation.

- 155,000 to 500,000 BTU input
- Single and Triple Pass Models
- Onboard Air Compressor (excluding the WOH-50 model)
- Swing out heat exchanger door
- Powder coat finish protection
- Lifetime prorated warranty on heat exchanger (10-yr. on WOH-50)

MODEL	PART NO.	BTU INPUT*	STACK SIZE	PASS	DUCT OPENING	ELECTRICAL REQUIREMENTS	FUEL CONSUMPTION**	BLOWER MOTOR HP	DIMENSIONS	SHIP WT (lbs)
WOH-15	1.103-060.0	155,000	8"	1	16" X 16"	115V 1PH	1.1 GAL/HR	3/4 HP	79"Lx22"Wx34.5"H	390
WOH-20	1.103-061.0	200,000	8"	1	16" X 16"	115V 1PH	1.4 GAL/HR	3/4 HP	92.5"Lx22"Wx34.5"H	437
WOH-31	1.103-062.0	315,000	8"	1	18" X 18"	115V 1PH	2.2 GAL/HR	1 HP	113.5"Lx26"Wx41"H	569
WOH-50	1.103-063.0	500,000	10"	3	23" X 41"	220V 1PH	3.6 GAL/HR	1 HP	52.31"Lx69.5"Wx34"H	927

\*BTU input based on industry standard 140,000 BTUs per gallon

\*\*Fuels: Used crankcase oil, transmission and hydraulic fluids, as well as other petroleum-based lubricants (any weight combination up to SAE 50, including #2 fuel oil).

### 4 Different Front-Load Series

Hotsy's line of front-loading automatic parts washers gives you a choice of load capacities ranging from 500 lbs. to 2,500 lbs. and internal load heights from 30" to 60".




**Easy access debris screen** prevents foreign objects from falling into reservoir.



**Integrated oil-skimmer** helps remove oil from cleaning solution in reservoir.

**Hotsy's internal roll-away door** saves floor space and prevents wash water from dripping on the shop floor.

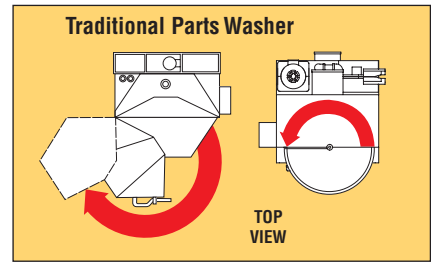

### 7530 SERIES



- Vertical Seal-less Pump
  - 3 HP
  - 50 GPM
  - 45 PSI
- 500 lbs. Load Capacity
- 40 Gal. Sump Capacity
- 6 kW Heater

**65"H x 45"W x 48"D**

Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring. The 7530 Series is equipped with standard fixed wheels.



MODEL	PART NO.	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7530	1.043-383.0	30"	25"	230/1	38	779
7531	1.043-382.0	30"	25"	208/1	40	779
7532	1.043-385.0	30"	25"	230/3	23	779
7533	1.043-386.0	30"	25"	460/3	11	779
7534	1.043-387.0	30"	25"	575/3	9	779
7535	1.043-384.0	30"	25"	208/3	24	779

### 7650 SERIES



- Vertical Seal-less Pump
  - 3 HP
  - 50 GPM
  - 45 PSI
- 750 lbs. Load Capacity
- 50 Gal. Sump Capacity
- 6 kW Heater

**75"H x 50"W x 51"D**

Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring. The 7650 Series is equipped with standard fixed wheels.



MODEL	PART NO.	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7650	1.043-405.0	40"	28"	230/1	38	850
7651	1.043-404.0	40"	28"	208/1	40	850
7652	1.043-407.0	40"	28"	230/3	23	850
7653	1.043-408.0	40"	28"	460/3	11	850
7654	1.043-409.0	40"	28"	575/3	9	850
7655	1.043-406.0	40"	28"	208/3	24	850

### 7660 SERIES



- Vertical Seal-less Pump
  - 5 HP
  - 110 GPM
  - 50 PSI
- 750 lbs. Load Capacity
- 50 Gal. Sump Capacity
- 9 kW Heater

**83"H x 50"W x 51"D**

Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring. The 7660 Series is equipped with standard fixed wheels.



MODEL	PART NO.	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7660	1.043-411.0	48"	28"	230/1	58	929
7661	1.043-410.0	48"	28"	208/1	60	929
7662	1.043-413.0	48"	28"	230/3	36	929
7663	1.043-414.0	48"	28"	460/3	17	929
7664	1.043-415.0	48"	28"	575/3	14	929
7665	1.043-412.0	48"	28"	208/3	37	929

### 7870 SERIES



- Vertical Seal-less Pump
    - 7.5 HP
    - 200 GPM
    - 50 PSI
  - 2500 lbs. Load Capacity
  - 156 Gal. Sump Capacity
  - 18 kW Heater
- 106"H x 66"W x 75"D**

Shown with optional filters



Includes: Oil Drain Container, Small Parts Basket, Parts Tree, and Containment Ring. No wheels available on this Series.

MODEL	PART NO.	WORKING HEIGHT	TURNTABLE DIAMETER	VOLT/PH	AMPS	SHIP WT (lbs)
7872*	1.043-438.0	60"	48"	230/3	67	2263
7873*	1.043-439.0	60"	48"	460/3	32	2263
7874*	1.043-440.0	60"	48"	575/3	26	2263

\*All models require flat bed shipping - call for estimated delivery date

AUTOMATIC WATER FILL - FIELD INSTALLED		7530	7650	7660	7870
<b>8.915-113.0</b>	Automatic Water Fill	■	■	■	
<b>TBD</b>	Automatic Water Fill				■
CONTAINMENT RINGS - FIELD INSTALLED		7530	7650	7660	7870
<b>8.731-256.0</b>	Containment Ring, 25"	■			
<b>8.705-957.0</b>	Containment Ring, 28"		■	■	
<b>TBD</b>	Containment Ring, 48"				■
FILTRATION SYSTEM - FIELD INSTALLED		7530	7650	7660	7870
<b>8.915-145.0</b>	Filtration	■			
<b>8.915-144.0</b>	Filtration & Sump Sweep	■			
<b>8.915-378.0</b>	Filtration		■	■	
<b>8.915-379.0</b>	Filtration & Sump Sweep		■	■	
<b>TBD</b>	Filtration, 2 Stage				■
<b>TBD</b>	Filtration & Sump Sweep, 2 Stage				■
INSERTS-DEBRIS SCREEN - FIELD INSTALLED		7530	7650	7660	7870
<b>8.915-143.0</b>	60 Mesh Insert for Debris Screen Tray	■			
<b>8.915-316.0</b>	60 Mesh Insert for Debris Screen Tray		■	■	
<b>TBD</b>	60 Mesh Insert for Debris Screen Tray				■
PARTS TREE - FIELD INSTALLED		7530	7650	7660	7870
<b>8.915-124.0</b>	Parts Tree, 4 Hook	■	■	■	
<b>TBD</b>	Parts Tree, 4 Hook				■
HEIGHT EXTENSION - FACTORY INSTALLED		7530	7650	7660	7870
<b>8.916-114.0</b>	Height Extension, 12"			■	
<b>TBD</b>	Height Extension, 12"				■
TIMERS - FIELD INSTALLED		7530	7650	7660	7870
<b>8.725-267.0</b>	Timer, Heater 24 hour 7 day (Field Installed)	■	■	■	
<b>8.725-268.0</b>	Timer, Heater & Skimmer 24 hour 7 day (Field Installed)	■	■	■	
<b>TBD</b>	Timer, Heater 24 hour 7 day (Field Installed)				■
<b>TBD</b>	Timer, Heater & Skimmer 24 hour 7 day (Field Installed)				■
TURNTABLE MATS - FIELD INSTALLED		7530	7650	7660	7870
<b>8.902-075.0</b>	Rubber Turntable Mat	■			
<b>8.915-324.0</b>	Rubber Turntable Mat		■	■	
<b>TBD</b>	Rubber Turntable Mat				■
TWO-TIER TURNTABLES - FIELD INSTALLED		7530	7650	7660	7870
<b>8.915-120.0</b>	Two-Tier Turntable	■			
<b>8.915-351.0</b>	Two-Tier Turntable		■		
<b>8.915-352.0</b>	Two-Tier Turntable			■	
<b>TBD</b>	Two-Tier Turntable				■
MISCELLANEOUS - FIELD INSTALLED		7530	7650	7660	7870
<b>9.802-283.0</b>	Hour Meter	■	■	■	■
<b>8.731-254.0</b>	Light Duty Small Parts Basket (8"x 8"x 4")	■	■	■	■
<b>8.913-702.0</b>	Oil Drain Container	■	■	■	■
<b>8.707-034.0</b>	Evaporator, Wastewater Drum	■	■	■	■

### 7230 SERIES



52"H x 32"W x 42"D



The **7230 Series** is a compact top-load, automatic, aqueous parts washer with a 22" turntable and 16" work height that fits most commercial applications. The 7230 is standard equipped with casters.

- Pump with Close-Coupled Seals
  - 1 HP • 28 GPM • 30 PSI
- 500 lbs. Load Capacity
- 23 Gal. Sump Capacity

Includes: Small Parts Basket, Containment Ring and Automatic Oil Skimmer

MODEL	PART NO.	WORK HEIGHT	TURNTABLE DIAMETER	HEATER			SHIP WT (lbs)
				VOLT/PH	kW	AMPS	
S7230-1	1.043-340.0	16"	22"	115/1	2	15	461
7230A	1.043-337.0	16"	22"	230/1	4.5	28	461
7231	1.043-375.0	16"	22"	208/1	4.5	30	461
7232	1.043-338.0	16"	22"	230/3	6	20	461
7233	1.043-339.0	16"	22"	460/3	6	10	461
7234	1.043-341.0	16"	22"	575/3	6	8	461
7235	1.043-377.0	16"	22"	208/3	6	21	461

OPTIONS	7230 SERIES
PART NO.	DESCRIPTION
<b>CONTAINMENT RINGS - FIELD INSTALLED</b>	
8.731-255.0	Containment Ring, 22"
<b>DETAIL &amp; POWER BRUSH - FIELD INSTALLED</b>	
8.725-250.0	Detail Brush (with pump) - Field Installed
8.725-258.0	Power Brush (pneumatic) - Field Installed
8.725-244.0	Detail and Power Brush Complete Kit - Field Installed
<b>TIMERS - FIELD INSTALLED</b>	
8.705-967.0	Timer, Heater, 7 day wall outlet 20 amp for S7230-1 only (Field Installed)
8.725-267.0	Timer, Heater, 7 day (Field Installed)
8.725-268.0	Timer, Heater & Skimmer, 7 day (Field Installed)
<b>MISCELLANEOUS - FIELD INSTALLED</b>	
8.725-262.0	Automatic Water Fill
8.731-254.0	Light Duty Small Parts Basket (8"x 8"x 4")
9.802-283.0	Hour Meter
8.725-255.0	60 Mesh Insert for Debris Screen Tray
8.902-074.0	Rubber Turntable Mat
8.707-034.0	Evaporator, Wastewater Drum

### 7320 SERIES

The **7320 Series** is our largest and most industrial top-load, automatic, aqueous parts washer featuring a 25" turntable driven by a 3HP pump with a working height of 18". The 7320 Series is standard equipped with fixed wheels.



50"H x 40"W x 51"D



Shown with options

- Vertical Seal-less Pump
  - 3 HP
  - 50 GPM
  - 45 PSI
- 500 lbs. Load Capacity
- 50 Gal. Sump Capacity

Includes: Small Parts Basket, Containment Ring and Automatic Oil Skimmer

MODEL	PART NO.	WORK HEIGHT	TURNTABLE DIAMETER	HEATER			SHIP WT (lbs)
				VOLT/PH	kW	AMPS	
7320A	1.043-346.0	18"	25"	230/1	6	38	722
7321	1.043-376.0	18"	25"	208/1	6	40	722
7322	1.043-347.0	18"	25"	230/3	6	23	722
7323	1.043-348.0	18"	25"	460/3	6	11	722
7324	1.043-349.0	18"	25"	575/3	6	9	722
7325	1.043-378.0	18"	25"	208/3	6	24	722

OPTIONS	7320 SERIES
PART NO.	DESCRIPTION
<b>CONTAINMENT RINGS - FIELD INSTALLED</b>	
8.731-256.0	Containment Ring, 25"
<b>DETAIL &amp; POWER BRUSH - FIELD INSTALLED</b>	
8.725-252.0	Detail Brush (with pump) - Field Installed
8.725-258.0	Power Brush (pneumatic) - Field Installed
8.725-246.0	Detail and Power Brush Complete Kit - Field Installed
<b>FILTRATION - FIELD INSTALLED</b>	
8.725-253.0	Filtration
8.725-254.0	Filtration & Sump Sweep
<b>TIMERS - FIELD INSTALLED</b>	
8.725-268.0	Timer, Heater & Skimmer 24 hour 7 day (Field Installed)
8.725-267.0	Timer, Heater 24 hour 7 day (Field Installed)
<b>MISCELLANEOUS - FIELD INSTALLED</b>	
8.725-261.0	Automatic Water Fill
8.731-254.0	Light Duty Small Parts Basket (8"x 8"x 4")
9.802-283.0	Hour Meter
8.915-316.0	60 Mesh Insert for Debris Screen Tray
8.902-075.0	Rubber Turntable Mat
8.913-702.0	Oil Drain Container
8.707-034.0	Evaporator, Wastewater Drum